




SEMINOLE WIRE & CABLE

836 Camden Ave
 Blenheim, NJ 08012
 Toll Free (800)-346-4378
 Fax (856)-228-0697
www.seminolewire.com
sales@seminolewire.com

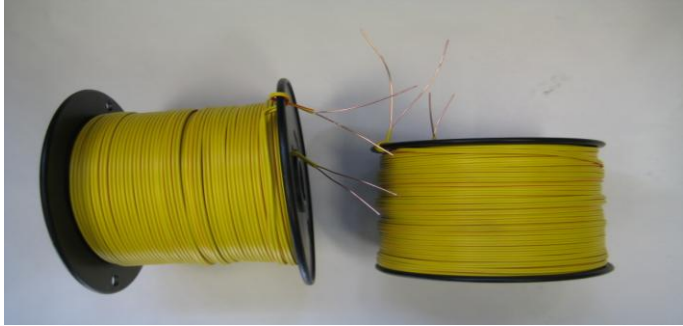

Product Data Sheet - Fireworks Wire

Insulation: Virgin PVC
 Conductor: Bare Solid Copper
 Application: Connecting Wire for Fireworks / Special Effects
 Temperature: -10°C to 60°C

AWG	Conductor / Construction	Insulation Thickness	Resistance Ohms/M ft.	Part No.	Weight lbs. / M
18 16/30	Duplex Stranded	0.025	5.48 ea cond	SR18ZIP	17.5
20	Duplex Solid	0.015	10.3 ea cond	FW20D	9.34
22	Duplex Solid	0.015	16.5 ea cond	FW22D	5.66
22	Twisted Solid	0.015	16.5 ea cond	FW22PB	5.62
22	Single Solid	0.015	16.5	FW22S	2.81
24	Duplex Solid	0.015	25.6 ea cond	FW24D	3.53
26	Duplex Solid	0.010	40.81 ea cond	FW26D	3.09

Packaging

All items available on Plastic or Metal spools. Custom spool sizes available at no additional cost.

All items can be sold by the foot or meter

Custom spooling and colors are available at no additional cost.

WE USE VIRGIN COMPOUND ONLY; NEVER REGROUND OR RECYCLED.